

UC-7402

RISC-based Ready-to-Run Embedded Network Computer with Dual LANs, PCMCIA, CompactFlash



Features

- Intel XScale IXP-422/425, 266/533 MHz processor
- On-board 128 MB RAM, 32 MB flash disk
- Dual 10/100 Mbps Ethernet for network redundancy
- CompactFlash socket for storage expansion
- PCMCIA supports WLAN, GPRS, UMTS, HSDPA
- Ready-to-run Linux platform
- Hardware level data encryption engine supports AES, DES and 3DES
- SSL, SSH, TLS security function
- Built-in firewall and VPN function
- Apache web server supports PHP and XML
- DIN-rail or wall-mount installation



Overview


MOXA UC-7402 is a web server embedded network computer that features dual 10/100 Mbps Ethernet ports, a PCMCIA interface for wireless LAN communication, and CompactFlash for mass storage disk expansion. UC-7402 is an excellent choice for embedded network applications and diverse M2M solutions.

UC-7402 is a rugged, compact embedded computer that is designed for industrial applications. Two key design features are the low power consumption and fanless operation, which together ensure greater reliability and longer system life. The communication oriented functionality includes both hardware and software. In fact, the software design is especially ideal for network communication based applications, such as

connecting to machines and other devices over a network. UC-7402 provides real-time data access, a secure network gateway, and a VPN router. The built-in web server allows UC-7402 to be used as a web-enabled gateway to let users access monitoring and control functions from anywhere on the network.

Since UC-7402 provides WLAN 802.11b/g connectivity, both wired and wireless networks can be integrated into a system communication medium. Users can capture real-time data from the network and aggregate it into the UC-7402 embedded web server, and convert data into various standard data formats. Data can be buffered and then distributed to the proper web browser.

Typical Application

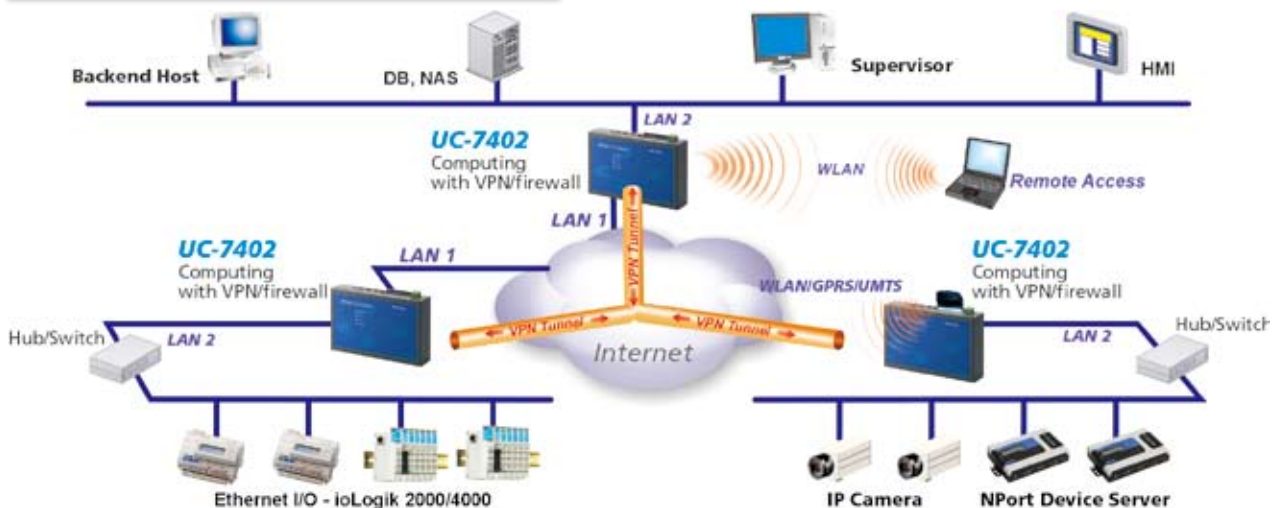

Hardware Specifications

System

CPU: Intel XScale IXP-425 533 MHz (Plus Version)

Intel XScale IXP-422 266 MHz

DRAM: 128 MB onboard

Flash: 32 MB onboard

PCMCIA: Cardbus card and 16-bit PCMCIA 2.1/ JEIDA 4.2 card

Storage Expansion: CompactFlash x 1 with full function

Console Port: RS-232 x 1, RJ45, PPP supported

Other: RTC, buzzer, Watchdog Timer

OS: Built-in embedded Linux

Network Communication

LAN: 10/100 Mbps x 2, RJ45

Protection: Built-in 1.5 KV magnetic isolation protection

LEDs

System: Ready x 1, Console x 1

LAN: 10M/100M x 2

Power Requirements

Power Input: 12 to 48 VDC

Power Consumption: 360 mA @ 12 VDC, 7W

Mechanical

Dimensions (WxDxH): 197 x 125 x 44 mm (7.8 x 4.9 x 1.7 in)

Weight: 830 g

Construction Material: SECC sheet metal, 1 mm

Mounting: Wall-mounting, DIN-Rail

Environmental

Operating Temperature: -10 to 60°C (14 to 140°F),
5 to 95% RH

Storage Temperature: -20 to 80°C (-4 to 176°F), 5 to 95% RH

Anti-Vibration: 1G @ IEC-68-2-6, sine wave, 5-500 Hz,
1 Oct./min, 1 hr/axis.

Anti-Shock: 5G @ IEC-68-2-27, half sine wave, 30 ms

Regulatory Approvals

EMC: FCC Part 15, CISPR 22 Class A

CE Class A: EN55022 Class A, EN61000-3-2 Class A,
EN61000-3-3, EN55024

Safety: TÜV: IEC/EN60950

UL/cUL: UL60950, CAN/CSA-C22.2 No. 60950-00

Warranty: 5 years

Software Specifications

Linux

Kernel Version: 2.6.10 (Plus Version)

2.4.18

Boot Loader: Redboot

Protocol Stacks: TCP, UDP, IPv4, SNMP V1/V3, ICMP, IGMP,
ARP, HTTP, CHAP, PAP, SSH 1.0/ 2.0, SSL, DHCP, NTP, NFS,
SMTP, Telnet, FTP, PPP, PPPoE

File System: JFFS2 (on-board flash)

System Utilities: bash, busybox, tinylogin, telnet, ftp, scp

Application Development Environment

MOXA Linux API Library

Linux Tool Chain: Gcc, Glibc, GDB

Windows Tool Chain: Gcc, Glibc, Insight (Windows-
based source level debug utility)

UC Finder: UC's LAN IP broadcast search utility for

Windows and Linux

Supporting Services and Daemons:

telnetd: Telnet Server daemon

ftpd: FTP server daemon

sshd: Secure shell server

Apache: Web server daemon, supports PHP and XML

MySQL: Database Server and Client

OpenVPN: Virtual private network service manager

iptables: Firewall service manager

pppd: dial in/out over serial port daemon & PPPoE

snmpd: snmpd agent daemon

inetd: TCP server manager program

Device Drivers:

PCMCIA CardBus (supports 802.11b/g wireless LAN
Card), CF Card, Watchdog Timer (WDT), RTC, Buzzer
MOXA 2G NPort Real TTY Driver

Ordering Information

UC-7402-LX Plus **NEW**

RISC-based Ready-to-Run Embedded Network Computer with IXP-425, Dual LANs, PCMCIA, CompactFlash, Linux 2.6

UC-7402-LX

RISC-based Ready-to-Run Embedded Network Computer with IXP-422, Dual LANs, PCMCIA, CompactFlash, Linux 2.4

All items include

- 1 UC-7402
- Quick Installation Guide
- Wall-mounting Kit
- DIN-Rail Mounting Kit
- Document & Software CD
- Ethernet Cable: RJ45 to RJ45 cross-over cable, 100 cm
- Console port cable: CBL-RJ45F9-150 8-pin RJ45 to female DB9 cable, 150 cm
- Universal Power Adaptor (includes terminal block to power jack converter)
- Product Warranty Statement